

FLIPAWAY

C RM

IN 1,600 AND 2,000 LB. LOAD CAPACITIES



**REDUCED MAINTENANCE AND
ORIGINAL FLIPAWAY DESIGN
MEANS SMOOTHER, HASSLE-
FREE DELIVERIES**


SPECIFICATIONS

Model	Lifting Capacity	Platform Load Area	Ramp	Approx. Weight
C-20RM	2000 lbs.	32" x 72"	4"	535 lbs.

MOUNTING REQUIREMENTS

Model	Bed Height Range	"A" Dimension	Mount Frame Clearance
All	36" - 43"	17.5" - 20"	25.75" - 27.75"
All	43" - 48"	22.5"	28.5"
All	49" - 52"	25"	25.5"

Important when determining **Bed Height Range**: The lesser dimension refers to vehicle loaded to maximum weight capacity. The greater dimension refers to vehicle when empty.

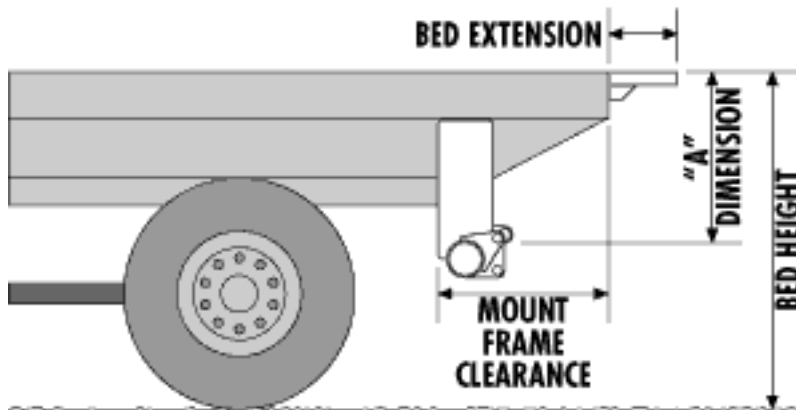

STANDARD EQUIPMENT

- [Electropak](#)
- [Reduced maintenance features](#)
- [Power unit weather protective box](#)
- [SuperSwitch \(permanent mount\)](#)

OPTIONAL EQUIPMENT

- Thermalpak with Voltage Guard
- Heavy-duty dock bumpers
- Super-duty dock bumpers with step
- Rubber bumpers (for heavy-duty dock bumpers)
- Rubber bumpers (for super-duty dock bumpers)
- Dual Controls
- Dual controls (power down)
- P.T.O. power kit (P.T.O & drive line not included)
- Power down power kit
- Pump & motor anti-theft device
- Snubber kit
- Cab shut-off switch
- Bed extension for 102" wide vehicle
- Low-bed option (34" minimum bed height)
- Remote, hand-held SuperSwitch w/cord, plug & socket
- Remote pump mounting kit
- Custom options available upon request